


# 丸形端子

(絶縁被覆抑え付き)

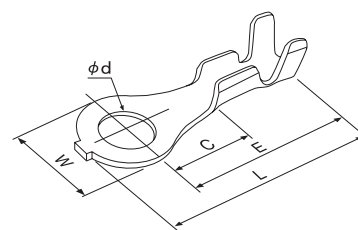

社内品番	表面処理	材料	適合電線範囲	AWG#	絶縁被覆外径	t	φd	W	L	C	E	備考	規格
16066-2	すずめっき	黄銅	0.2~0.5	24~20	1.4~2.6	0.5	3.2	6.5	17.0	7.05	13.75		UL SF
16066-M2	すずめっき付材料	黄銅	0.2~0.5	24~20	1.4~2.6	0.5	3.2	6.5	17.0	7.05	13.75		
16067-2	すずめっき	黄銅	0.2~0.5	24~20	1.4~2.6	0.5	3.7	6.5	17.0	7.05	13.75		UL SF
16068-2	すずめっき	黄銅	0.2~0.5	24~20	1.4~2.6	0.5	4.3	6.5	17.0	7.05	13.75		UL SF
16090-2	すずめっき	黄銅	stranded wire 0.3~0.774 single-core wire φ0.7~0.8	22~20	stranded wire 1.5~2.8 single-core wire 4.0	0.5	4.4	8.0	16.5	5.9	12.5	図有り (枠外参照)	
16092-2	すずめっき	黄銅	0.75~2.0	18~14	2.8~3.4	0.5	4.4	8.0	16.5	5.9	12.5	図有り (枠外参照)	
16111-1	めっきなし	黄銅	0.5~1.25	20~16	3.5	0.6	4.4	10.0	21.5	8.0	16.5		
16111-2	すずめっき	黄銅	0.5~1.25	20~16	3.5	0.6	4.4	10.0	21.5	8.0	16.5		
16112-1	めっきなし	黄銅	0.5~1.25	20~16	3.5	0.6	5.4	10.0	21.5	8.0	16.5	JIS D5403 LA 105相当	
16112-2	すずめっき	黄銅	0.5~1.25	20~16	3.5	0.6	5.4	10.0	21.5	8.0	16.5	JIS D5403 LA 105相当	
16123-1	めっきなし	黄銅	0.5~1.25	20~16	2.9	0.6	6.4	12.0	23.6	9.0	17.6	JIS D5403 LA 106相当	
16123-2	すずめっき	黄銅	0.5~1.25	20~16	2.9	0.6	6.4	12.0	23.6	9.0	17.6	JIS D5403 LA 106相当	
16144-1	めっきなし	黄銅	0.5~1.287	20~16	2.2~2.8	0.6	3.2	7.0	18.0	6.0	14.5	JIS D5403 LA 103相当	
16144-2	すずめっき	黄銅	0.5~1.287	20~16	2.2~2.8	0.6	3.2	7.0	18.0	6.0	14.5	JIS D5403 LA 103相当	
16146-1	めっきなし	黄銅	0.5~1.287	20~16	1.6~3.0	0.6	4.4	8.0	18.0	7.0	14.0		UL
16146-2	すずめっき	黄銅	0.5~1.287	20~16	1.6~3.0	0.6	4.4	8.0	18.0	7.0	14.0		UL
16147-2	すずめっき	黄銅	0.5~1.287	20~16	1.6~3.0	0.6	5.3	8.0	18.0	7.0	14.0		UL
16241-2	すずめっき	黄銅	0.141~0.4	26~22	0.95~1.4	0.4	2.5	5.0	10.7	3.2	8.2		UL
16241-M2	すずめっき付材料	黄銅	0.141~0.4	26~22	0.95~1.4	0.4	2.5	5.0	10.7	3.2	8.2		UL
16243-1	めっきなし	黄銅	0.221~0.763	24~(18)	1.4~2.8	0.4	2.6	5.0	10.7	3.2	8.2		UL SF
16243-2	すずめっき	黄銅	0.221~0.763	24~(18)	1.4~2.8	0.4	2.6	5.0	10.7	3.2	8.2		UL SF
16243-22	すずめっき	黄銅	0.221~0.763	24~(18)	1.4~2.8	0.4	2.6	5.0	10.7	3.2	8.2		UL SF
16244-2	すずめっき	黄銅	0.221~0.763	24~(18)	1.4~2.8	0.4	3.2	5.0	10.7	3.2	8.2		UL SF
16418-1	めっきなし	黄銅	0.5~1.287	20~16	2.2~2.7	0.5	3.2	5.2	11.5	3.0	8.9		UL
16418-2	すずめっき	黄銅	0.5~1.287	20~16	2.2~2.7	0.5	3.2	5.2	11.5	3.0	8.9		UL
16421-32-2	すずめっき	黄銅	0.5~1.25	20~16	2.2~3.1	0.6	3.2	8.0	19.5	7.0	15.5		UL SF
16421-43-1	めっきなし	黄銅	0.5~1.25	20~16	2.2~3.1	0.6	4.4	8.0	19.5	7.0	15.5	JIS D5403 LA 104相当	UL SF
16421-43-2	すずめっき	黄銅	0.5~1.25	20~16	2.2~3.1	0.6	4.4	8.0	19.5	7.0	15.5	JIS D5403 LA 104相当	UL SF
16426-1	めっきなし	黄銅	0.2~0.5	24~20	1.3~2.6	0.6	4.4	8.0	19.5	7.0	15.5		
16426-2	すずめっき	黄銅	0.2~0.5	24~20	1.3~2.6	0.6	4.4	8.0	19.5	7.0	15.5		
16531-2	すずめっき	黄銅	0.5~1.38	20~16	1.9~3.1	0.5	3.2	6.5	17.0	6.75	13.75		UL SF
16532-2	すずめっき	黄銅	0.5~1.38	20~16	1.9~3.1	0.5	3.7	6.5	17.0	6.75	13.75		UL SF
16532-M2	すずめっき付材料	黄銅	0.5~1.38	20~16	1.9~3.1	0.5	3.7	6.5	17.0	6.75	13.75		
16533-2	すずめっき	黄銅	0.5~1.38	20~16	1.9~3.1	0.5	4.3	6.5	17.0	6.75	13.75		UL SF