



# 裸端子 角形先開き(VD形)

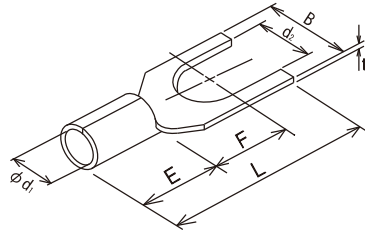

品番 Catalog No.	規格 Standards	適合ねじ径 Stud Size	適合電線範囲 Wire Size	寸法 (mm) Dimensions						入り数 Qty/Box	適合工具 Tool No.		
		φ mm	mm <sup>2</sup> (AWG#) (φ mm)	φ d <sub>1</sub>	d <sub>2</sub>	B	E	L	F	t		内箱	
VD1.25-3L	UL SFA	3	0.25~1.65 (22~16) (0.57~1.44)	1.7	3.2	5.7	4.5	15.7	6.5	0.8	1,000	T-112	
VD1.25-3.5SS		3.5			3.7								6.3
VD1.25-3.5S		4			4.4								
VD1.25-4SS		4			4.4	8.0							
VD1.25-4		4			4.4								8.0
VD2-3S	UL SFA	3	1.04~2.63 (16~14) (1.14~1.82)	2.3	3.3	5.7	4.8	15.7	6.5	0.85	1,000	T-112	
VD2-3.5SS		3.5			3.7	6.3	4.5						16.0
VD2-3.5S		4			4.4								
VD2-4S		4			4.4	7.0							
VD3.5-4	UL SFA	4	2.63~4.60 (13~11) (1.82~2.40)	3.0	4.3		8.0	6.0	18.0	7.3	1.0	1,000	T-112 "5.5"
VD5.5-4		4	2.63~6.64 (12~10) (1.82~2.89)	3.4	4.4	8.5	6.5	16.0	5.2	1.0	1,000	T-112	

# 裸端子 低圧開閉器用(CB形)



品番 Catalog No.	適合ねじ径 Stud Size	適合電線範囲 Wire Size	寸法 (mm) Dimensions						入り数 Qty/Box	適合工具 Tool No.	
	φ mm	mm <sup>2</sup> (AWG#) (φ mm)	φ d <sub>1</sub>	φ d <sub>2</sub>	B	E	L	F	t		内箱
CB22-5	5	16.78~26.66 (4) (4.62~5.81)	7.7	5.4	12.0	11.5	30.0	12.5	1.8	300	H-104 N
CB22-6	6			6.6							
CB60-6	6	42.42~60.57 (1/0) (—)	11.4	6.6	16.0	18.5	46.0	19.5	2.0	100	H-104 N NH-12
CB60-8	8			8.6							
CB60-10	10			10.7							
CB100-8	8	96.30~117.20 (4/0) (—)	16.4	8.6	22.0	20.0	52.5	21.5	2.7	50	NH-12
CB100-10	10			10.7							
CB100-12	12			13.2							
CB150-8	8	117.2~152.05 (250~300MCM) (—)	19.5	8.6	22.0	27.5	60.5	22.0	3.3	30	NH-12 NH-21
CB150-10	10			10.7							
CB150-12	12			13.2							

注記：CB22の舌部先端は、丸形状とまります。