



裸端子 丸形(R形) [R1.25~R5.5]




品番 Catalog No.	規格 Standards	適合ねじ径 Stud Size	適合電線範囲 Wire Size	寸法 (mm) Dimensions							入り数 Qty/Box	適合工具 Tool No.	備考			
		φ mm	mm ² (AWG#) (φ mm)	φ d ₁	φ d ₂	B	E	L	F	t	内箱		規格該当品			
													旧国鉄	旧電電		
R1.25-2	UL	2	0.25~1.65 (22~16) (0.57~1.44)	1.7	2.5	5.5	4.5	11.5	4.2	0.8	2,000	T-112				
R1.25-3	UL JIS	3			3.3			14	6.7		1,000		SS1.25-3	1.25-A-3		
R1.25-3ML	UL	3.5			3.8			11.5	4.2		2,000					
R1.25-3.5S	UL				5.8			14.1								
R1.25-3.5SL		4			4.4			6.6	14.5		6.7		1,000			
R1.25-3.5	UL JIS				8.0			15.7	7.2							
R1.25-4S	UL JIS	4			5.4			8.0	15.7		7.2		500			
R1.25-4	UL JIS	5			6.6			12.0	21.2		10.7			SS1.25-4	1.25-A-4	
R1.25-5	UL JIS	6			6.6			12.0	21.2		10.7		500			
R1.25-6	UL	8			8.6			13.5	24.7		13.4			SS1.25-5	1.25-A-5	
R1.25-8	UL	8	10.6	13.5	24.7	13.4	500									
R1.25-10	UL	10					300									
R1.25-10	UL									300				SS1.25-8	1.25-A-8	
R1.25-10	UL														SS1.25-10	1.25-A-10
R2-2S		2	1.04~2.63 (16~14) (1.14~1.82)	2.3	2.5	5.5	4.5	11.0	3.7	0.85	1,000	T-112				
R2-3SL	UL	3			3.3			14.5	7.2							
R2-3	UL	3.5			6.5			12.0	4.2							
R2-3.5S	UL				3.8			15.2	7.8							
R2-3.5SL		4			6.6			15.6	7.2				500			
R2-3.5	UL JIS				4.4			16.0	7.2							
R2-4S	UL JIS	4			8.5			16.0	7.2				500			
R2-4	UL JIS	5			5.4			9.5	16.5							
R2-5	UL JIS	6			6.6			12.0	21.5				11.0	500		
R2-6	UL JIS	8			8.6			13.5	25.0				13.7		SS2-4	2-A-4
R2-8	UL JIS	8			10.6			13.5	25.0				13.7	300		
R2-10	UL	10			13.2			19.0	29.4				15.4		SS2-5	2-A-5
R2-12		12					250									
R2-12										250					SS2-6	2-A-6
R2-12															SS2-8	2-A-8
R2-12															SS2-10	2-A-10
R3.5-3.5	UL	3.5	2.63~4.6 (13~11) (1.82~2.4)	3.0	3.8	8.0	6.0	17.7	7.7	1.0	1,000	T-112				
R3.5-4	UL	4			4.4			19.0	8.2							
R3.5-5S	UL	5			5.4			19.0	8.2				500			
R3.5-5	UL	6			6.6			21.0	9.0							
R3.5-6S	UL	3.5			3.8			6.5	16.0				6.2	1,000		
R3.5-6	UL				4.4			7.0	15.2				5.2			
R5.5-3.5	UL	3.5	2.63~6.64 (12~10) (1.82~2.89)	3.4	3.8	6.5	6.5	16.0	6.2	1.0	1,000	T-112				
R5.5-4S	UL	4			4.4			17.7	7.2				500			
R5.5-4SL		5			9.5			18.5	7.2					500		
R5.5-4	UL JIS				8.0			17.7								
R5.5-5S	UL	6			8.0			17.7	7.2				500			
R5.5-5	UL JIS				5.4			9.5	18.5							
R5.5-5L	UL	8			6.6			12.0	25.0				12.5	500		
R5.5-6	UL JIS	10			8.6			15.0	28.0				14.0		SS5.5-4	5.5-A-4
R5.5-8	UL JIS	8			10.7			15.0	28.0				14.0	500		
R5.5-10	UL JIS	12			13.2			19.0	31.8				15.8		SS5.5-5	5.5-A-5
R5.5-12	UL	12			17.2			32.0	47.5				25.0	300		
R5.5-16	UL	16												100		

裸端子 丸形(R形) [R8~R38]



品番 Catalog No.	規格 Standards	適合ねじ径 Stud Size	適合電線範囲 Wire Size	寸法 (mm) Dimensions							入り数 Qty/Box	適合工具 Tool No.	備考																																									
		φ mm	mm ² (AWG#) (φ mm)	φ d ₁	φ d ₂	B	E	L	F	t	内箱		規格該当品																																									
													旧国鉄	旧電電																																								
R8-4S		4	6.64~10.52 (8) (2.89~3.65)	4.5	4.3	9.5	8.1	22.3	9.4	1.2	500	T-122 H-104N (NH-12) ※オプション ダイス使用																																										
R8-4	UL													4.4	12.0	23.5	8-A-4																																					
R8-5S		5											6.64~10.52 (8) (2.89~3.65)	4.5	5.3	9.5	8.1	22.3	9.4	1.2	500	T-122 H-104N (NH-12) ※オプション ダイス使用																																
R8-5	UL																							5.4	12.0	23.5	SS8-5	8-A-5																										
R8-6S		6																					6.64~10.52 (8) (2.89~3.65)	4.5	6.4	9.5	8.1	22.3	9.4	1.2	500	T-122 H-104N (NH-12) ※オプション ダイス使用																						
R8-6	UL																																	6.6	12.0	23.5	SS8-6	8-A-6																
R8-6L		6																															6.64~10.52 (8) (2.89~3.65)	4.5	6.4	9.5	8.1	22.3	9.4	1.2	500	T-122 H-104N (NH-12) ※オプション ダイス使用												
R8-8	UL																																											8.6	15.0	29.5	13.9	SS8-8	8-A-8					
R8-10	UL	10																																									6.64~10.52 (8) (2.89~3.65)	4.5	10.7	15.0	8.1	29.5	13.9	1.2	300	T-122 H-104N (NH-12) ※オプション ダイス使用	SS8-10	8-A-10
R8-12	UL	12																																																			13.2	32.0
R8-16	UL	16	17.2	32.0	48.5	24.4		8-A-16																																														
R14-5S		5	10.52~16.78 (6) (3.65~4.62)	5.8	5.4	10.0	10.0	28.5	13.5	1.5	500	H-104N (NH-12) ※オプション ダイス使用																																										
R14-5	UL													12.0	29.5	13.5	SS14-5	14-A-5																																				
R14-6S		6											10.52~16.78 (6) (3.65~4.62)	5.8	6.6	12.0	10.0	29.5	13.5	1.5	500	H-104N (NH-12) ※オプション ダイス使用																																
R14-6	UL																							16.0	32.7	14.7	SS14-6	14-A-6																										
R14-6L		6																					10.52~16.78 (6) (3.65~4.62)	5.8	6.6	12.0	10.0	29.5	13.5	1.5	500	H-104N (NH-12) ※オプション ダイス使用																						
R14-8S																																	8	8.6	16.0	32.7	14.7	SS14-8	14-A-8															
R14-8	UL	8																															10.52~16.78 (6) (3.65~4.62)	5.8	10.7	16.0	10.0	32.7	14.7	1.5	300	H-104N (NH-12) ※オプション ダイス使用											SS14-10	14-A-10
R14-10	UL	10																																									13.2	22.0	41.0	20.0	SS14-12	14-A-12						
R14-12	UL	12																																									17.2	32.0	51.0	25.0		14-A-16						
R14-16	UL	16																																																				
R22-5S		5	16.78~26.66 (4) (4.62~5.81)	7.7	5.4	14.0	11.5	33.0	13.2	1.8	300	H-104N (NH-12) ※オプション ダイス使用																																										
R22-5	UL																																											16.5	33.0	13.3	SS22-5	22-A-5						
R22-6S		6											16.78~26.66 (4) (4.62~5.81)	7.7	6.6	14.0	11.5	33.0	13.2	1.8	300	H-104N (NH-12) ※オプション ダイス使用																																
R22-6	UL																																											17.5	38.0	17.7	SS22-6	22-A-6						
R22-6L		6																					16.78~26.66 (4) (4.62~5.81)	7.7	6.6	14.0	11.5	33.0	13.2	1.8	300	H-104N (NH-12) ※オプション ダイス使用																						
R22-8S																																											8	16.5	33.0	13.2	SS22-8	22-A-8						
R22-8	UL	8																															16.78~26.66 (4) (4.62~5.81)	7.7	10.7	17.5	11.5	38.0	17.7	1.8	250	H-104N (NH-12) ※オプション ダイス使用	SS22-10	22-A-10										
R22-10	UL	10																																									13.2	22.0	42.0	19.5	SS22-12	22-A-12						
R22-12	UL	12																																									17.2	32.0	52.5	25.0		22-A-16						
R22-16	UL	16																																																				
R38-5		5	26.66~42.42 (2) (5.81~7.34)	9.4	5.4	16.0	13.2	38.5	17.3	1.9	200	H-104N (NH-12) (NH-21) ※オプション ダイス使用																																										
R38-6SS																																											6	6.4	13.5	30.7	10.8							
R38-6	UL	6											26.66~42.42 (2) (5.81~7.34)	9.4	6.6	16.0	13.2	38.5	17.3	1.9	200	H-104N (NH-12) (NH-21) ※オプション ダイス使用																						38-A-6										
R38-8S		8																																									8.6	22.0	42.0	17.8	SS38-8	38-A-8						
R38-8	UL	8																					26.66~42.42 (2) (5.81~7.34)	9.4	10.7	16.0	13.2	38.5	17.3	1.9	200	H-104N (NH-12) (NH-21) ※オプション ダイス使用																						
R38-10S		10																																									13.2	22.0	42.0	17.8	SS38-10	38-A-10						
R38-10	UL	10																															26.66~42.42 (2) (5.81~7.34)	9.4	17.2	32.0	13.2	63.0	33.8	1.9	100	H-104N (NH-12) (NH-21) ※オプション ダイス使用	SS38-12	38-A-12										
R38-12	UL	12																																																				
R38-16	UL	16																																																				

裸端子 丸形(R形) [R60~R325]

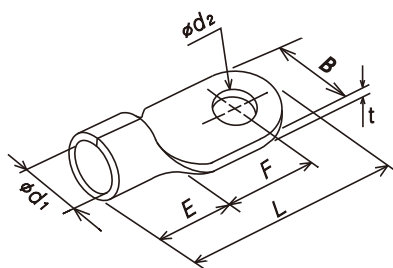

品番 Catalog No.	規格 Standards	適合ねじ径 Stud Size	適合電線範囲 Wire Size	寸法 (mm) Dimensions							入り数 Qty./Box	適合工具 Tool No.	備考								
		ϕ mm	mm ² (AWG#)	ϕd_1	ϕd_2	B	E	L	F	t	内箱		規格該当品								
													旧国鉄	旧電電							
R60-6	UL	6	42.42~60.57 (1/0)	11.4	6.6	22.0	18.5	49.0	19.5	2.0	100	H-104N NH-12 (NH-21) ※オプション ダイス使用		60-A-6							
R60-8	UL	8			8.6															SS60-8	60-A-8
R60-10	UL	10			10.7															SS60-10	60-A-10
R60-12	UL	12			13.2	32.0	57.0	22.5	67.0	32.5			2.0	50							
R60-14	UL	14			15.2																
R60-16	UL	16			17.2												SS60-16	60-A-16			
R100-8	UL	8	96.30~117.2 (4/0)	16.4	8.6	28.5	20.0	55.5	21.3	2.7	50	NH-12 (NH-21) ※オプション ダイス使用		100-A-8							
R100-10	UL	10			10.7															SS100-10	100-A-10
R100-12	UL	12			13.2															SS100-12	100-A-12
R100-16	UL	16			17.2	32.0	69.0	33.0							SS100-16	100-A-16					
R150-10	UL	10	117.20~152.05 (250~300MCM)	19.5	10.7	36.0	27.5	67.0	21.5	3.3	30	NH-12 NH-21		SS150-10							
R150-12	UL	12			13.2															SS150-12	150-A-12
R150-12L	UL	12			15.2																
R150-14	UL	14			17.2																
R150-16	UL	16															SS150-16	150-A-16			
R150-16L	UL	16																			
R200-10	UL	10	192.6~242.27 (400MCM)	24.0	10.7	44.0	32.0	72.5	24.0	4.0	20	NH-21		SS200-10							
R200-12S	UL	12			13.2															SS200-12	200-A-12
R200-12	UL	12			15.2																
R200-12L	UL	12			17.2																
R200-14	UL	14																			
R200-16	UL	16															SS200-16	200-A-16			
R325-12S	UL	12	242.27~325 (500~600MCM)	28.0	13.2	50.5	36.5	86.0	30.0	4.5	10	NH-21		SS325-12							
R325-12L	UL	12			17.2																
R325-16	UL	16																			

